


BELKI "I"

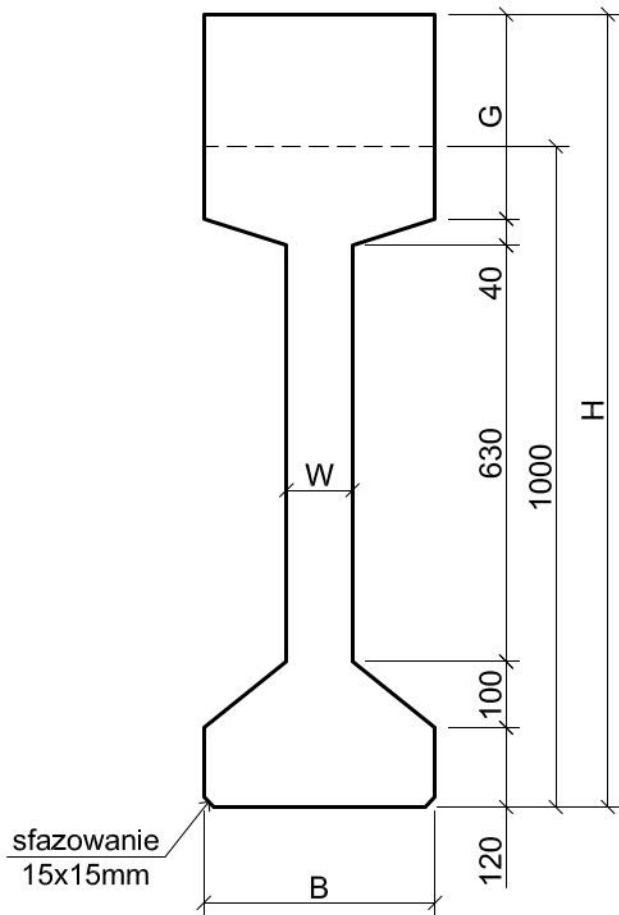

Hmin=1000
Hmax=1200

CIĘŻAR WŁASNY KN/m

H	B	W	G	g= kN/m	Imax
1000	350	100	110	4,37	30000
1000	400	150	110	5,62	30000
1000	450	200	110	6,87	30000
1000	500	100	110	5,49	30000
1000	550	150	110	6,74	30000
1000	600	200	110	7,99	30000
1100	350	100	210	5,24	30000
1100	400	150	210	6,62	30000
1100	450	200	210	7,99	30000
1100	500	100	210	6,74	30000
1100	550	150	210	8,11	30000
1100	600	200	210	9,49	30000
1200	350	100	310	6,11	30000
1200	400	150	310	7,62	30000
1200	450	200	310	9,12	30000
1200	500	100	310	7,99	30000
1200	550	150	310	9,49	30000
1200	600	200	310	10,99	30000

UWAGA: Możliwe jest uzyskanie wysokości pośrednich tj. 1050, 1150 mm przy zachowaniu pozostałych wymiarów z tabeli.

